


> SEV

50 – 100 LITRES



- > Five bolt flange for easy access and periodical maintenance
- > Various models with capacity from 50 to 100 litres
- > Voltage: 220~240 V 50-60 H
- > Stainless Steel Heating Element
- > Titanium Healthy Blue silicon glasslined
- > Neoprene Gasket System
- > Magnesium sacrificial anode for added protection
- > Temperature level indicator
- > On/off light indicator
- > Pressure relief valve set to 6 bar
- > Manual external temperature adjustment
- > 3 years warranty on tank

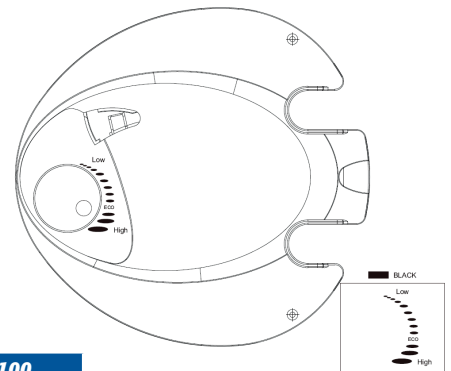

SEV			SEV-50	SEV-80	SEV-100
DHW tapping profile			M	M	L
ErP Class	(G - A Class)		C	C	C
Capacity		litres	47.5	76	97
Power		kW	3	3	3
Heating time	ΔT 35° C	minutes	40.7'	65.1'	83.1'
	ΔT 45° C	minutes	52.3'	83.7'	106.9'
Weight	EMPTY	Kg	18.0	22.7	26.9
	FULL		65.5	98.7	123.9
Water Connections		inches	1/2" M	1/2" M	1/2" M
Dimensions	WxHxD	mm	450x578x480	450x809x480	450x973x480
CODE			GRDR4W0A	GRDR6W0A	GRDR7W0A

FEATURES



EASY TO MAINTAIN



OPERATING LIGHT



TEMPERATURE ADJUSTMENT



ON/OFF SWITCH



INGRESS PROTECTION IPX4



RUST FREE



SHOCK-PROOF CASING



BLUE FOREVER HEATING ELEMENT